

# Workhorse Monitor

## Direct Reading 1200, 600, 300 kHz ADCP

The MONITOR is Teledyne RD Instruments' most popular direct-reading Acoustic Doppler Current Profiler (ADCP). The unit is typically bottom frame-mounted and hard-wired to shore to provide real-time monitoring of coastal currents.


The Monitor's high data accuracy and reliability make it a favorite for deployments in high-volume traffic areas such as ports and harbors, where the data is often integrated into a Vessel Traffic Monitoring System. In fact, the Monitor has been selected for most major port programs undertaken in the United States.

The Monitor offers a choice of three frequencies and ranges, to meet a wide array of data requirements. The unit also offers a flexible upgrade path, which includes an external battery pack, pressure sensor, bottom tracking capability for moving boat applications, and directional wave measurement.



## PRODUCT FEATURES

- **Extreme accuracy and reliability:** The Monitor is ideally suited for the most demanding environments, including high traffic areas such as ports and harbors.
- **Versatility:** This direct reading unit can easily be upgraded to tackle a wide variety of coastal applications. Typical upgrades include pressure sensor, external battery pack, bottom tracking, and directional wave measurement—a single instrument can do it all!
- **Precision data:** Teledyne RDI's Broadband signal processing delivers very low-noise data, resulting in unparalleled data resolution and minimal power consumption.
- **A four-beam solution:** Teledyne RDI's 4-beam design improves data reliability by providing a redundant data source in the case of a blocked or damaged beam; improves data quality by delivering an independent measure known as error velocity; and improves data accuracy by reducing variance in your data.

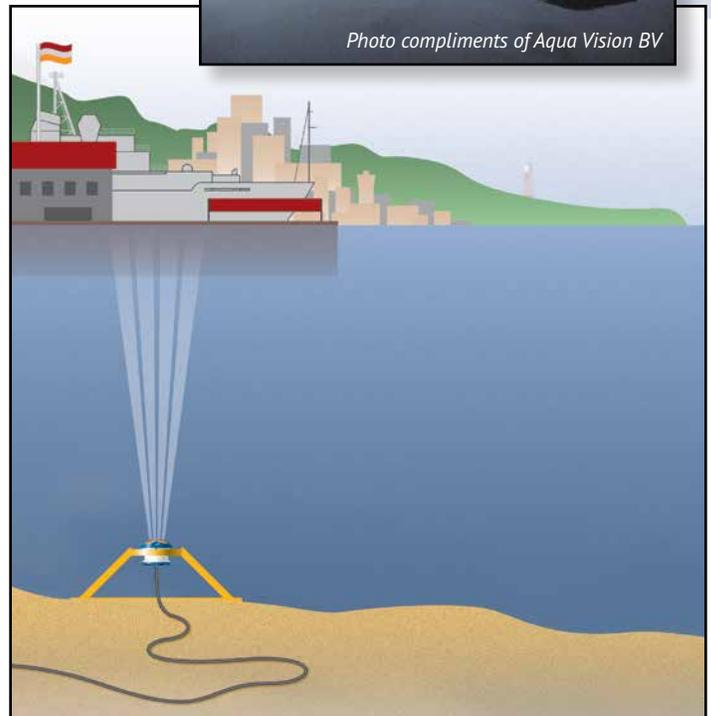

**TELEDYNE MARINE**  
RD INSTRUMENTS  
Everywhereyoulook™

# Workhorse Monitor

Direct Reading 1200, 600, 300 kHz ADCP



## TECHNICAL SPECIFICATIONS

		1200 kHz		600 kHz		300 kHz	
Water Profiling	Depth Cell Size <sup>1</sup>	Typical Range <sup>2</sup> 12m		Typical Range <sup>2</sup> 50m		Typical Range <sup>2</sup> 110m	
	Vertical Resolution	Range <sup>3</sup>	Std. Dev. <sup>4</sup>	Range <sup>3</sup>	Std. Dev. <sup>4</sup>	Range <sup>3</sup>	Std. Dev. <sup>4</sup>
	0.25 m	11 m	14.0 cm/s				
	0.5 m	12 m	7.0 cm/s	38 m	14.0 cm/s	see note <sup>1</sup>	
	1 m	13 m	3.6 cm/s	42 m	7.0 cm/s	83 m	14.0 cm/s
	2 m	15 m <sup>2</sup>	1.8 cm/s	46 m	3.6 cm/s	93 m	7.0 cm/s
	4 m	see note <sup>1</sup>		51 m <sup>2</sup>	1.8 cm/s	103 m	3.6 cm/s
	8 m					116 m <sup>2</sup>	1.8 cm/s
Long Range Mode	2 m	19 m	3.4 cm/s				
	4 m			66 m	3.6 cm/s		
	8 m					154 m	3.7 cm/s
Profile Parameters	Velocity accuracy	0.3% of water velocity relative to ADCP ±0.3 cm/s		0.3% of water velocity relative to ADCP ±0.3 cm/s		0.5% of water velocity relative to ADCP ±0.5 cm/s	
	Velocity resolution	0.1 cm/s		0.1 cm/s		0.1 cm/s	
	Velocity range	±5 m/s default, ±20 m/s max		±5 m/s default, ±20 m/s max		±5 m/s default, ±20 m/s max	
	Number of depth cells	1-255		1-255		1-255	
	Ping rate	2 Hz (typical)		2 Hz (typical)		2 Hz (typical)	
Echo Intensity Profile	Vertical resolution	Depth cell size, user configurable					
	Dynamic range	80 dB					
	Precision	±1.5 dB					
Transducer and Hardware	Beam angle	20°					
	Configuration	4-beam, convex					
	Internal memory	Two PCMCIA card slots; no memory card included					
	Communications	Serial port selectable by switch for RS-232 or RS-422. ASCII or binary output at 1200-115,200 baud					
Environmental	Standard depth rating	200 m; optional to 500 m, 1000 m, 6000 m					
	Operating temperature	-5° to 45°C					
	Storage temperature (without batteries)	-30° to 60°C					
	Weight in air	7.0 kg					
	Weight in water	3.0 kg					
Software	TRDI's Windows™-based software included: <b>WinSC</b> —Data Acquisition System; <b>WinADCP</b> —Data Display and Export						
Power	Input Power	20-50 VDC					
Standard Sensors	Temperature (mounted on transducer)	Range -5° to 45°C, Precision ±0.4°C, Resolution 0.01°					
	Tilt	Range ±15°, Accuracy ±0.5°, Precision ±0.5°, Resolution 0.01°					
	Compass (fluxgate type, includes built-in field calibration feature)	Accuracy ±2° <sup>5</sup> , Precision ±0.5° <sup>5</sup> , Resolution 0.01°, Maximum tilt ±15°					
Available Options	<ul style="list-style-type: none"> <li>• Memory: 2 PCMCIA slots; total 4GB</li> <li>• Pressure sensor</li> <li>• External battery case</li> <li>• High-resolution water-profiling modes</li> <li>• Bottom tracking</li> <li>• AC/DC power converter, 48VDC output</li> <li>• Conversion kit for internal power supply and memory</li> <li>• Directional Waves Array</li> <li>• <b>Velocity</b>—Data Display, Processing, and Export software</li> </ul>						
Dimensions	228.0mm wide x 201.5mm long ( <i>line drawings available upon request</i> )						

1 User's choice of depth cell size is not limited to the typical values specified.

2 Longer ranges available.

3 Profiling range based on temperature values at 5°C and 20°C, salinity = 35ppt.

4 BroadBand mode single-ping standard deviation (Std. Dev.).

5 <±1.0° is commonly achieved after calibration.



**TELEDYNE MARINE**  
RD INSTRUMENTS  
Everywhere you look™

[www.teledynemarine.com](http://www.teledynemarine.com)

14020 Stowe Drive, Poway, CA 92064 USA  
Tel. +1-858-842-2600 • Email: [rdisales@teledyne.com](mailto:rdisales@teledyne.com)

Les Nertieres 5 Avenue Hector Pintus 06610 La Gaude France  
Tel. +33-49-211-0930 • Email: [rdie@teledyne.com](mailto:rdie@teledyne.com)